




VISIONio

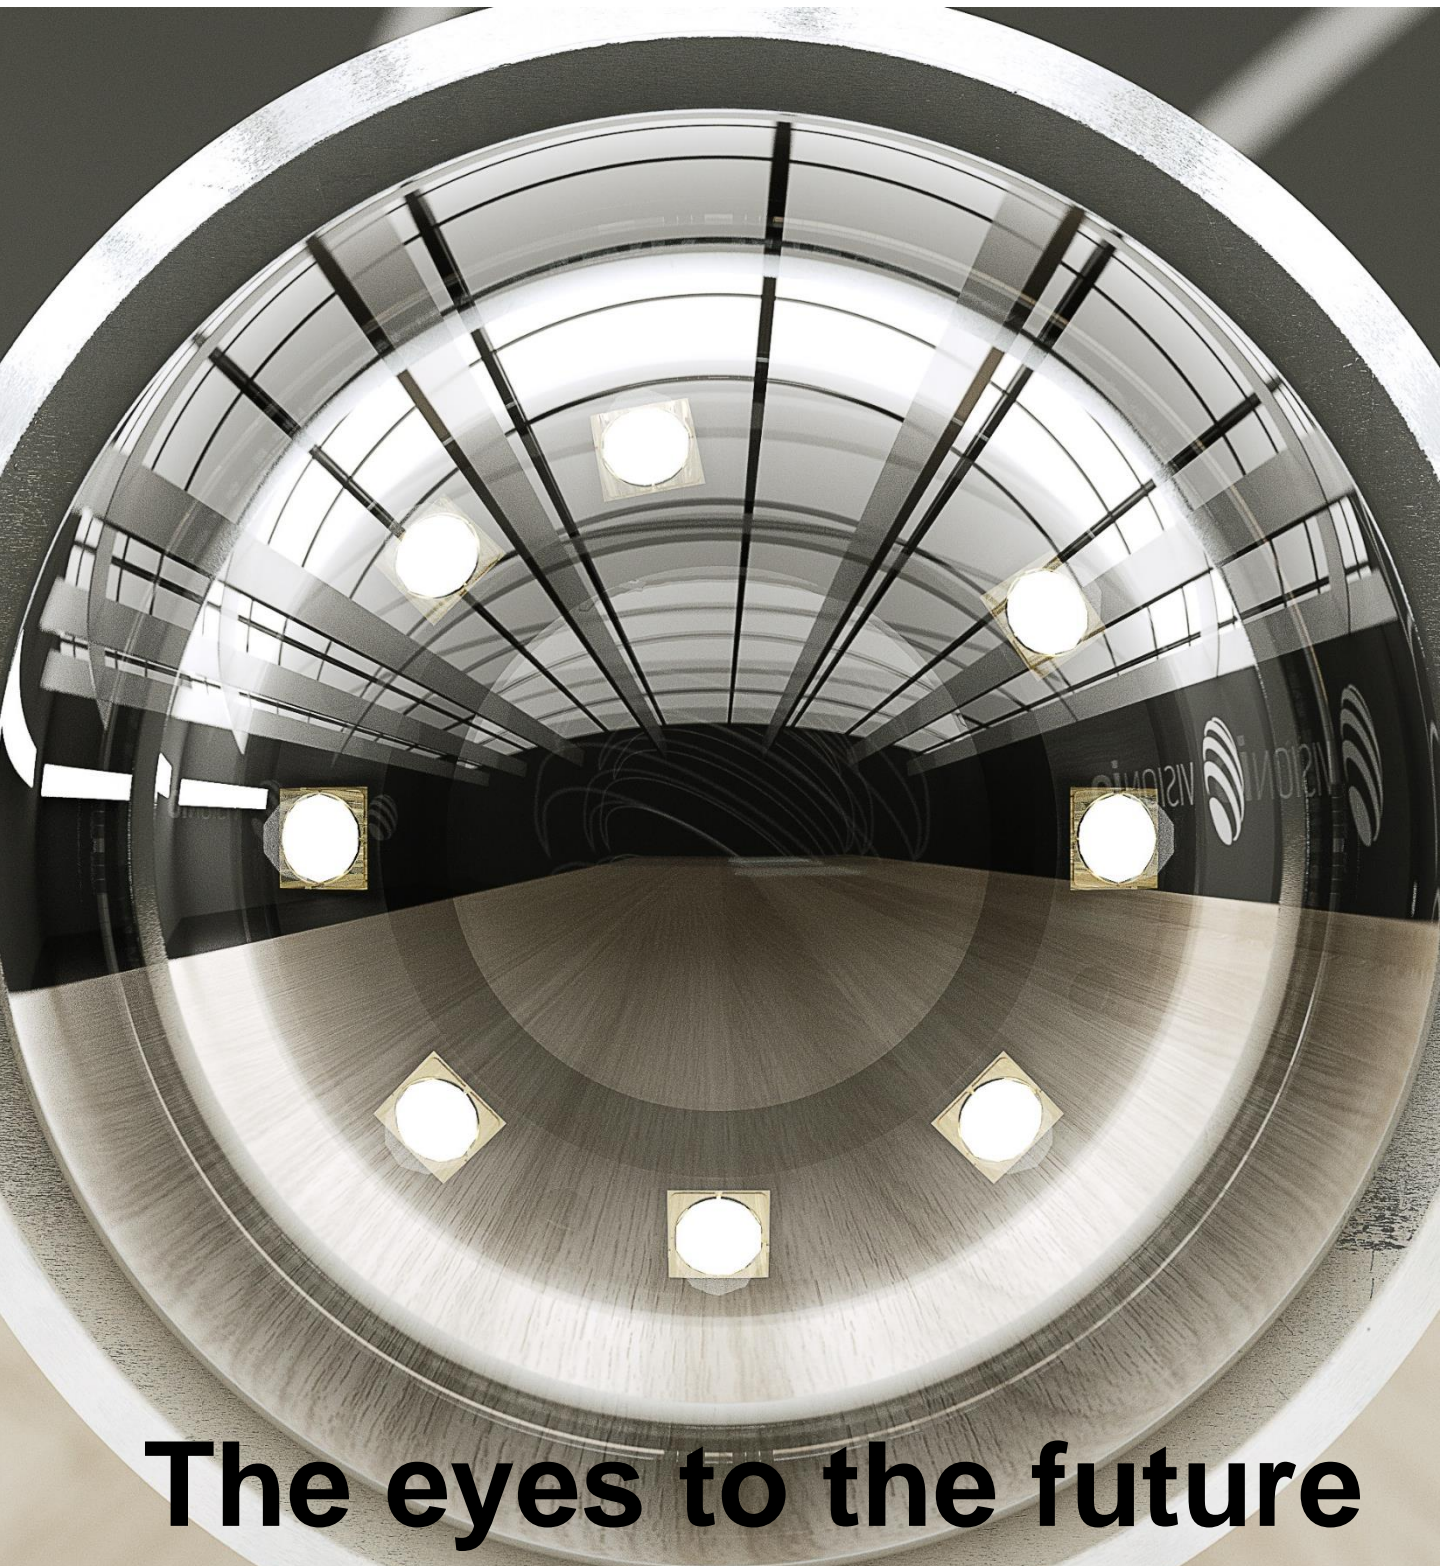

The eyes to the future

Vision ReadyCAM® GO

Technical specifications

| Vision ReadyCAM® GO | Specifications |
|-----------------------|--------------------------------------------|
| Pressure | 4350 psi / 300 bar |
| Temperature | 60°C / 140°F |
| Minimum Tool Diameter | 149,5 mm/ 5,87 inch |
| Weight in air | 17 kg / 37,5 lbs |
| Electrical interface | Subconn MCBH4M |
| Fish neck | 2,313" FN |
| Tensile strength | 47600kg |
| Certified to | DNVGL-ST-E273 2.7 portable offshore units. |
| Certified to | EN 13155 fixed load lifting attachments. |
| Field of view | 180°/360° |
| Image frame rate | 5MPX colour |
| Pump rate | Up to 4bpm |
| Transportation | Helicopter or boat |
| Deployment | Wire or pipe |

| Surface power/telemetry | Specifications |
|-------------------------|-------------------------------|
| Dimensions | 330 x 211 x 70 mm (L x W x H) |
| Weight | 1,5 kg / 3,3lbs |
| Power requirements | 88-264VAC / 100W |

| Cable reel | Specifications |
|----------------|------------------------------------|
| Cable capacity | 350m / 1250ft or 600m/2000ft |
| Cable type | Combined power and communications. |
| Dimensions | 624 x 363 x 498 mm (L x W x H) |
| Weight | 40kg / 88lbs |

