




VISIONio

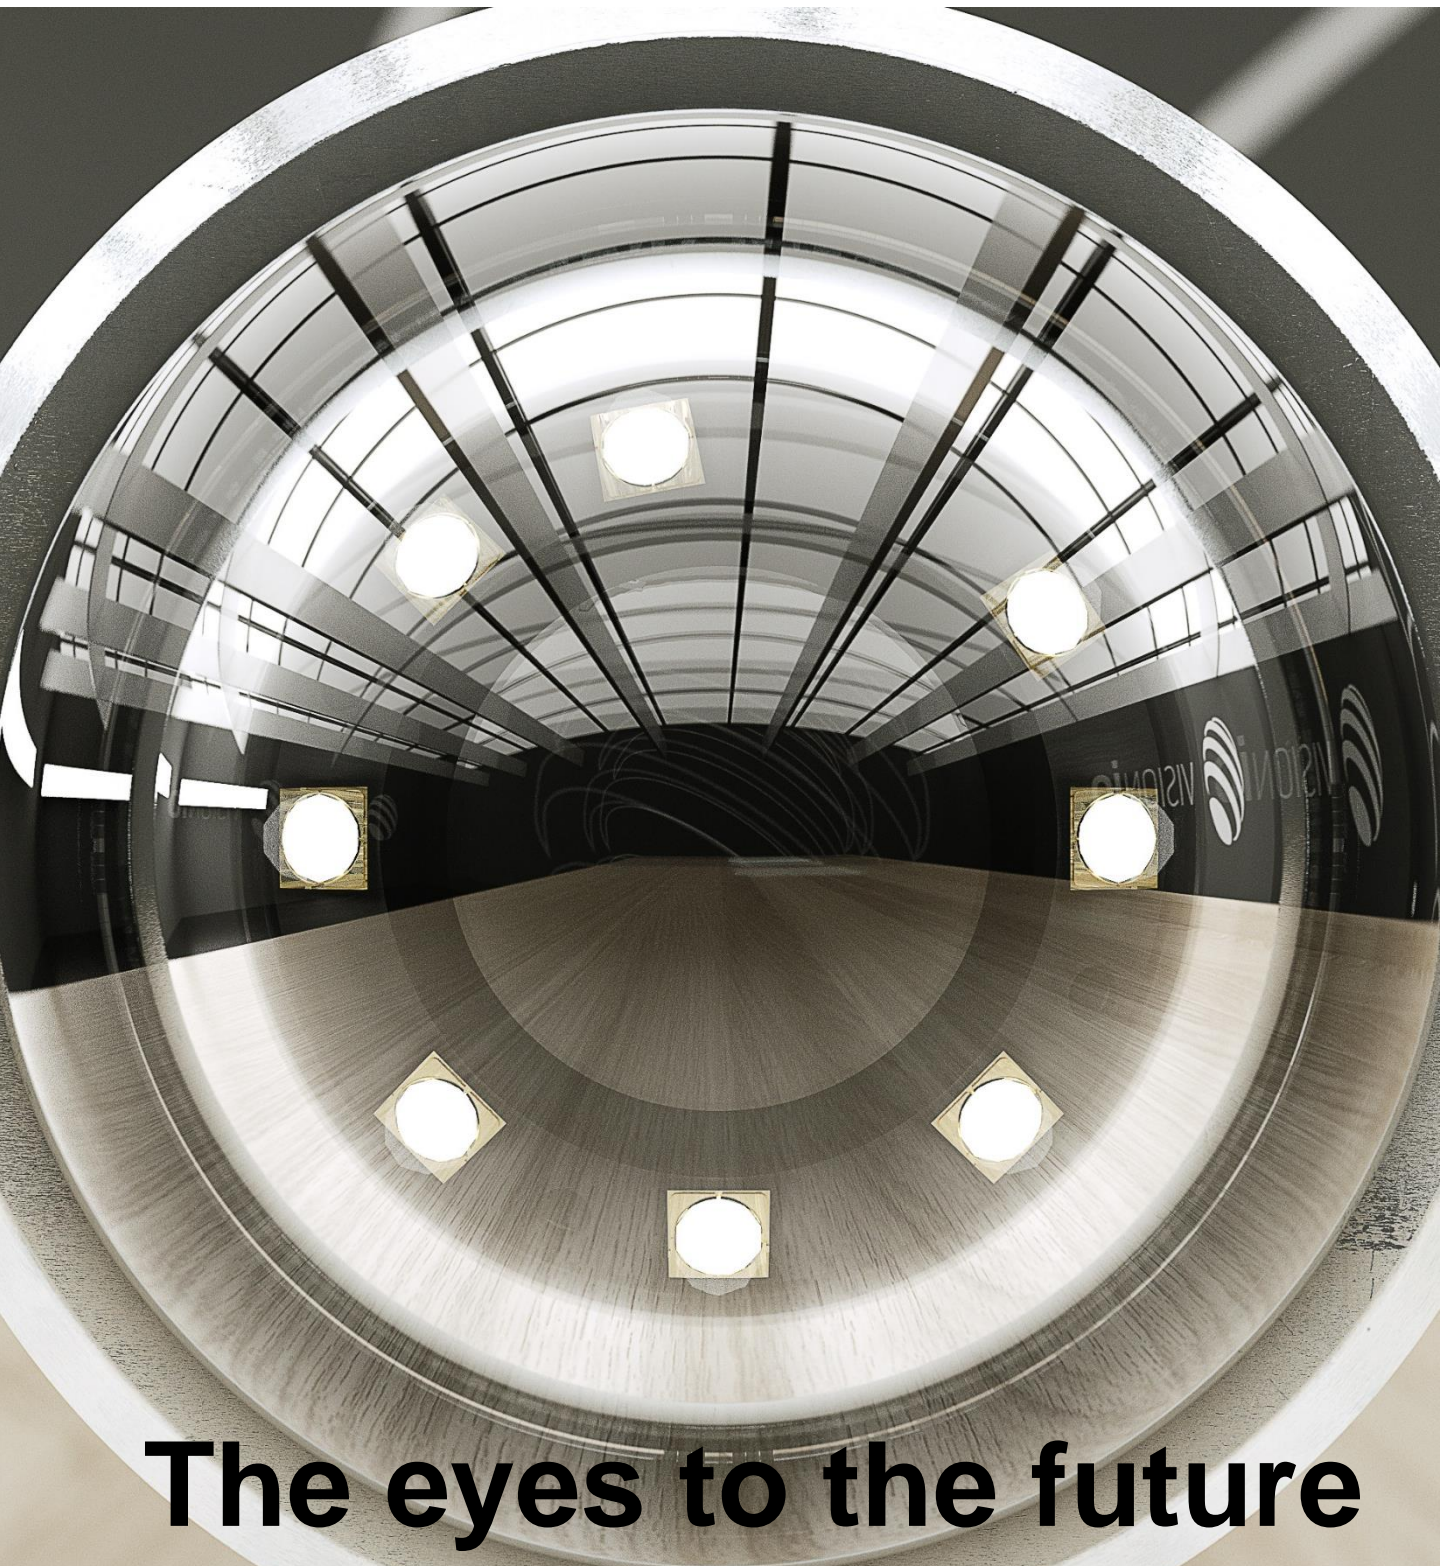

The eyes to the future

Vision FlexCAM®

Technical specifications

Vision FlexCAM®	Specifications
Pressure	4350 psi / 300 bar
Temperature	45° C / 113° F
Minimum Tool Diameter	150 mm
Tensile strength	1500kg MBL / 500kg SWL
Certified to	DNV 2.7.1 Approved
Certified to	ATEX zone 1, 11A-T3
Certified to	NORSOK Z-015 NORSOK E-001 NORSOK S-001 NORSOK S-002
Field of view	180°/360°
Image frame rate	5mpx, 14 fps monochrome
Pump rate	4 bpm
Transportation	6 ft Container
Deployment	Container winch, pig launched
Cable	1250m or 650m
Container	6 ft Container
Dimension (BxWxH)	1590 x 1846 x 2673
Weight	4600kg
Power req	230 VAC 50H7@16A
Winch	Integrated winch with 500kg pull weight

