




**VISIONio**

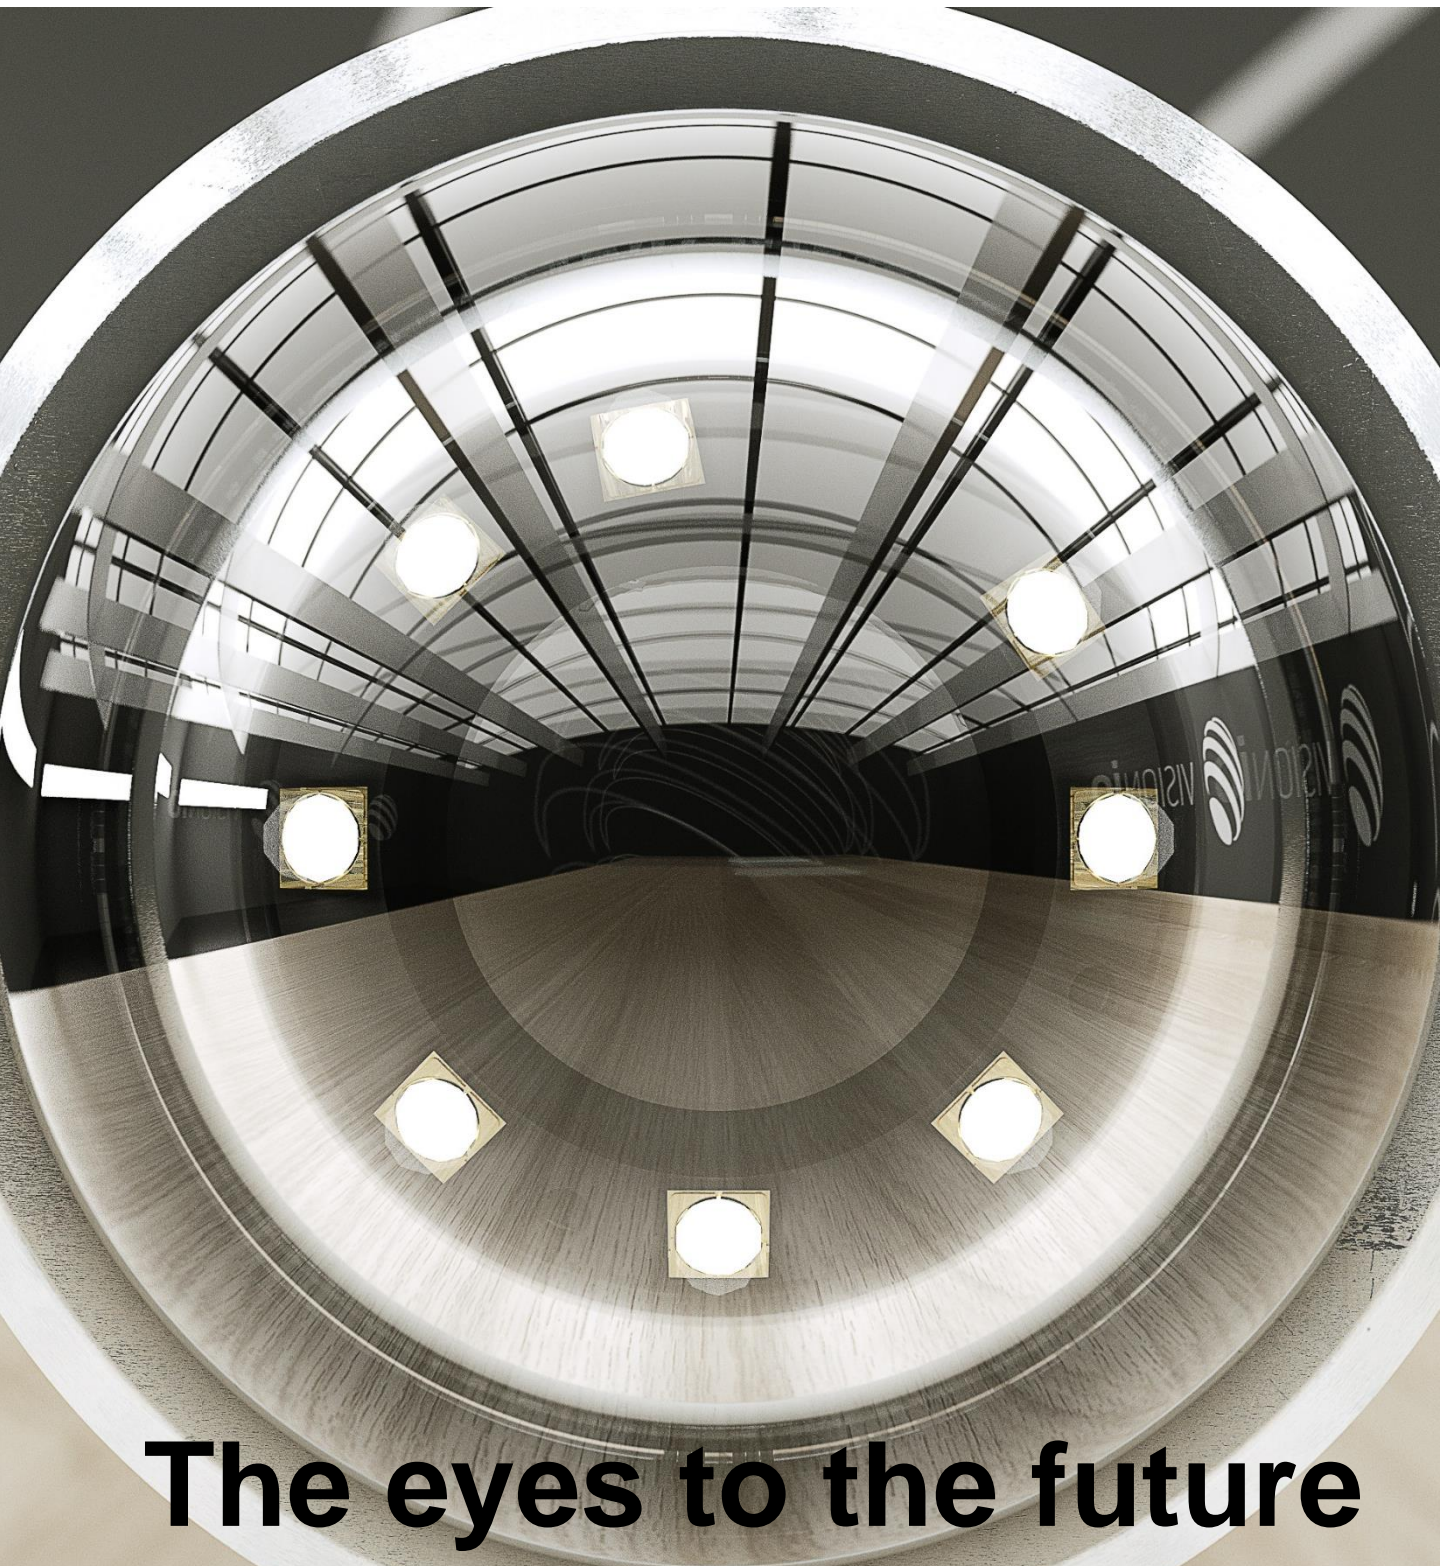

**The eyes to the future**

# Vision ReadyCAM<sup>®</sup>

## Technical specifications

| Vision ReadyCAM <sup>®</sup> | Specifications   |
|------------------------------|--|
| Pressure                     | 4350 psi / 300 bar   |
| Temperature                  | 45° C / 113° F   |
| Minimum Tool Diameter        | 150 mm   |
| Tensile strength             | 1500kg MBL / 500kg SWL                                       |
| Certified to                 | DNV 2.7.1 Approved   |
| Certified to                 | ATEX zone 1, 11A-T3  |
| Certified to                 | NORSOK Z-015<br>NORSOK E-001<br>NORSOK S-001<br>NORSOK S-002 |
| Field of view                | 180°/360°  |
| Image frame rate             | 5mpx, 5fps colour  |
| Pump rate                    | 4 bpm  |
| Transportation               | 6 ft Container   |
| Deployment                   | Container winch, pig launched                                |
| Cable                        | 1250m or 650m  |
| Container                    | 6 ft Container   |
| Dimension (BxWxH)            | 1590 x 1846 x 2673   |
| Weight                       | 4600kg   |
| Power req                    | 230 VAC 50H7@16A   |
| Winch                        | Integrated winch with 500kg pull weight                      |

